

Quattro™ II

INSTRUCTION MANUAL

CAUTION: United States Federal Law restricts this device to sale by or on the order of a physician



This manual is valid for the Quattro™ II

This user manual is published by Current Solutions™, LLC

Current Solutions™, LLC does not guarantee its contents and reserves the right to improve and amend it at any time without prior notice. Amendments may however be published in new editions of this manual.

All Rights Reserved.Rev.V1.0 © 2012

Declaration of conformity:

**Current Solutions™, LLC. declares that the Quattro™ II
complies with following normative documents:**

**IEC60601-1, IEC60601-1-2, IEC60601-2-10, ISO 7010
ISO14971, ISO10993-1, ISO10993-5, ISO10993-10**

Contents

1. FOREWORD.....	4
2. SAFETY INFORMATION.....	4
3. INDICATIONS FOR USE.....	8
4. PRESENTATION.....	9
5. INSTALLATION.....	11
6. OPERATION.....	13
7. MAINTENANCE.....	30
8. TROUBLESHOOTING	31
9. SPECIFICATIONS.....	32
10.STORAGE	34
11.DISPOSAL.....	34
12.EMC TABLE.....	35
13.WARRANTY.....	38
14.NORMALIZED SYMBOLS.....	39


**1.
FOREWORD**


**1.1
General
information** Thank you for purchasing the Quattro™ II. The microprocessor controlled Quattro™ II provides interferential (4-pole), premodulated (2-pole interferential), medium frequency (Russian), EMS and TENS waveform. You can choose between several different amplitude modulation options. The interferential and premodulated modes offer frequency modulation as well as a static frequency option.


**1.2
Introduction
to This
Manual** This manual has been written for the users of Quattro™ II. It contains general information on the operation, precautionary practices, and maintenance information. In order to maximize its use, efficiency, and the life of the system, please read this manual thoroughly and become familiar with the controls, as well as the accessories before operating the system.

**2.
SAFETY
INFORMATION**

**2.1
Precaution
definitions** The precautionary instructions found in this section and throughout this manual are indicated by specific symbols. Understand these symbols and their definitions before operating this equipment. The definition of these symbols is as follows;

 **Caution:** Text with a “CAUTION” indicator will explain possible safety infractions that could have the potential to cause minor to moderate injury or damage to equipment.

 **Warning:** Text with a “WARNING” indicator will explain possible safety infractions that will potentially cause serious injury and equipment damage.

 **Danger:** Text with a “DANGER” indicator will explain possible safety infractions that are imminently hazardous situations that would result in death or serious injury.

2.2 CAUTION



Caution:

- Federal law (USA) restricts this device to sale by or on the order of a physician.
- Keep yourself informed of the contraindications.
- Read, understand, and practice the warnings, cautions and operating instructions. Know the limitations and hazards associated with using any device. Observe the precautionary and operational decals placed on the unit. Always follow the operating instructions prescribed by your healthcare practitioner.
- The long-term effects of chronic electrical stimulation are unknown. Electrical stimulation devices do not have any curative value.
- Stimulation is not effective for pain of central origin, including headache.
- Stimulation is not a substitute for pain medications and other pain management therapies.
- This stimulator not intended for unattended, personal use by patients who have noncompliant, emotionally disturbed, dementia, or low IQ.
- Stimulation delivered by this device may be sufficient to cause electric shock. Electrical current of this magnitude must not flow through the thorax or across the chest because it may cause a cardiac arrhythmia.
- Do not place electrodes on the front of the throat as spasm of the Laryngeal and Pharyngeal muscle may occur. Stimulation over the carotid sinus (neck region) may close the airways, make breathing difficult, and may have adverse effects on the heart rhythm or blood pressure.
- Do not place electrodes on your head or at any sites that may cause the electrical current to flow transcerebrally (through the head).
- Patients with heart disease, epilepsy, cancer or any other health condition should not use this device without first consulting a physician.
- Some patients may experience skin irritation or hypersensitivity due to the electrical stimulation or electrical conductive medium (gel).
- Use caution when the patient has a tendency to bleed internally, such as following an injury or fracture;
- Use caution following recent surgical procedures when stimulation may disrupt the patient's healing process;
- Use caution if stimulation is applied over the menstruating or pregnant uterus;
- Use caution if stimulation is applied over areas of skin that lack normal sensation.
- Electrode placement and stimulation settings should be based on the guidance of prescribing practitioner.
- Effectiveness is highly dependent upon patient selection by a practitioner qualified in the management of pain patients.

- The electrodes are only to be placed on healthy skin. Avoid skin irritation by ensuring that good contact is achieved between electrodes and skin.
- If the stimulation levels are uncomfortable or become uncomfortable, reduce the stimulation Intensity to a comfortable level.
- Never use the device in rooms where aerosols (sprays) are used or pure oxygen is being administered.
- Do not use this device at the same time as other equipment which sends electrical pulses to your body.
- Do not confuse the electrode cables and contacts with your headphones or other devices, and do not connect the electrodes to other devices.
- Turn the device off before applying or removing electrodes.
- Electrical stimulators should be used only with the leads and electrodes recommended for use by the manufacturer.
- Keep the stimulator out of reach of children.

2.3 WARNING



Warning

- This device should be used only under the continued supervision of a licensed physician.
- TENS is a symptomatic treatment and, as such, suppresses the sensation of pain, which would otherwise serve as a protective mechanism.
- Safety has not been established for the use of therapeutic electrical stimulation during pregnancy. Do not use during pregnancy unless directed by your physician.
- Electrical stimulation is not effective for pain of central origin.
- Electronic monitoring equipment (such as ECG monitors and ECG alarms) may not operate properly when electrical stimulation is in use.
- Stimulation should not be applied over the carotid sinus nerves, particularly in patients with a known sensitivity to the carotid sinus reflex.
- Do not apply stimulation over the patient's neck because this could cause severe muscle spasms resulting in closure of the airway, difficulty in breathing, or adverse effects on heart rhythm or blood pressure.
- Stimulation should not be applied transthoracically in that the introduction of electrical current into the heart may cause cardiac arrhythmias.
- Stimulation should not take place while the user is connected to high-frequency surgical equipment, it may cause burn injuries on the skin under the electrodes, as well as problems with the stimulator.
- Do not use the stimulator in the vicinity of shortwave or microwave

therapy equipment, since this may affect the output power of the stimulator.

- Never use in environments with high humidity such as in the bathroom or when having a bath or shower.
- Do not apply stimulation while the patient is sleeping;
- Caution should be used in applying electrical stimulation to patients suspected of having heart disease. Further clinical data is needed to show there are no adverse results.
- Never use near the heart. Stimulation electrodes should never be placed anywhere on the front of the thorax (marked by ribs and breastbone), but above all not on the two large pectoral muscles. Here it can increase the risk of ventricular fibrillation and lead to cardiac arrest.
- Electrodes should not be placed over the eyes, in the mouth, near the genitals or internally.
- Keep electrodes separate during treatment, electrodes in contact with other could result in improper stimulation or skin burns.
- Apply stimulation only to normal, intact, clean, healthy skin.
- Avoid use over or near bone growth centers until bone growth is complete.

2.4 Danger



Danger

Patients with an implanted neurostimulation device must not be treated with or be in close proximity to any shortwave diathermy, microwave diathermy, therapeutic ultrasound diathermy, or laser diathermy anywhere on their body. Energy from diathermy (shortwave, microwave, ultrasound, and laser) can be transferred through the implanted neurostimulation system, can cause tissue damage, and can result in severe injury or death. Injury, damage, or death can occur during diathermy therapy even if the implanted neurostimulation system is turned "off."

2.5 Adverse reaction

Skin irritation, inflammation, and electrode burns beneath the electrodes are potential adverse reactions.

2.6 Contraindications

- Do not use this device on patients who have a cardiac pacemaker, implanted defibrillator, or other implanted metallic or electronic device, because this may cause electric shock, burns, electrical interference, or death.
- Do not use this device on patients whose pain syndromes are undiagnosed.
- This device should not be used when cancerous lesions are present in the treatment area.
- This device should not be used over or near bone growth centers until

bone growth is complete.

- This device should not be used over a healing fracture.
- This device should not be used over or applied to the eye.
- This device should not be used over a pregnant uterus.
- This device should not be used on ischemic tissues in individuals with vascular disease where the blood supply would be unable to follow the increase in metabolic demand and tissue necrosis might result.



3. INDICATIONS FOR USE

For TENS, EMS, Russian, Interferential and premodulated waveforms:

- Relaxation of muscle spasms
- Prevention disuse atrophy
- Increase local blood circulation
- Muscle re-education
- Maintaining or increasing range of motion
- Symptomatic relief and management of chronic, Intractable pain
- Post-traumatic acute pain
- Post-surgical acute pain

4. PRESENTATION

4.1 Panel For front view

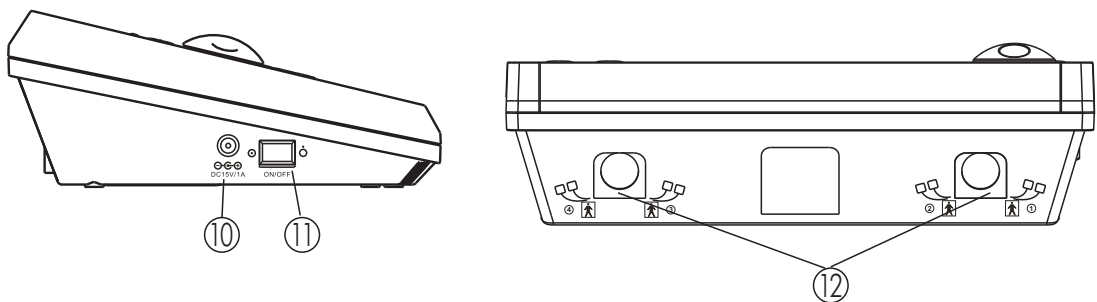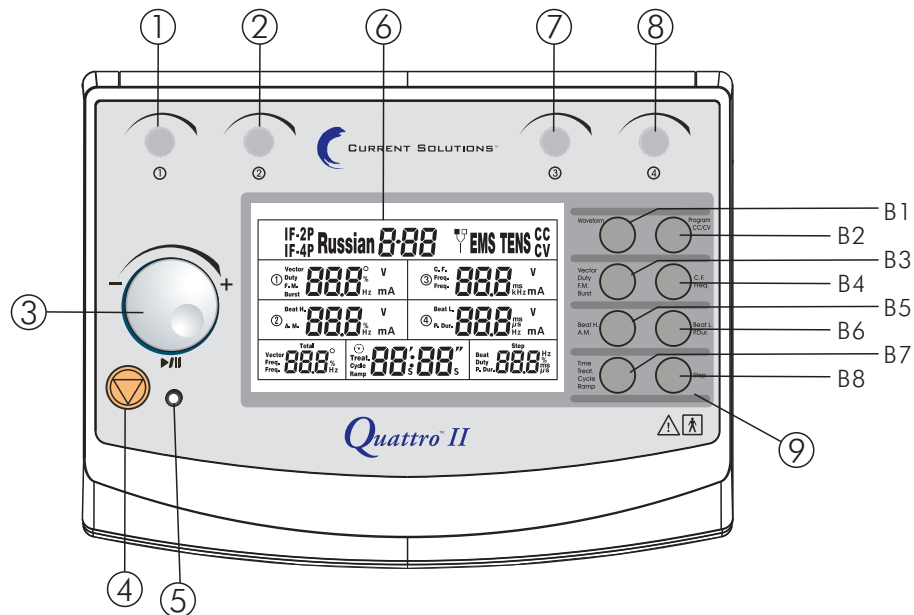




- 1) Adjust the output intensity of channel 1.
- 2) Adjust the output intensity of channel 2.
- 3) Parameters control knob and pause button.
- 4) Stop treatment button.
- 5) Power indicator.
- 6) LCD display: Shows the current information of the device.
- 7) Adjust the output intensity of channel 3.
- 8) Adjust the output intensity of channel 4.
- 9) Eight parameters selection buttons, see below for details:
 - B1: Toggle the therapeutic waveform.
 - B2: Toggle the therapeutic program and select the output mode (CC/CV).
 - B3: Toggle the parameter Vector/Duty/F.M./Burst
 - B4: Toggle the parameter Freq./C.F.
 - B5: Toggle the parameter Beat H./A.M.
 - B6: Toggle the parameter Beat L./P.Dur.
 - B7: Toggle the parameter Treat./Cycle/Ramp time
 - B8: Step button

Remark:

- CC — Constant current output mode.
 - CV — Constant voltage output mode.
 - F.M. — Frequency Modulation
 - Burst— Burst Frequency
 - Freq. — Frequency
 - C.F. — Carrier Frequency
 - Duty — Duty Cycle for Russian waveform
 - Beat H. — Sweep High Beat Frequency
 - A.M. — Amplitude Modulation
 - Beat L. — Sweep High Beat Frequency
 - P.Dur. — Pulse Duration
 - Treat. — Treatment time
 - Cycle— Cycle time
 - Ramp— Ramp time
- 10) Adapter receptacle
 11) ON/OFF switch
 12) Output connector: connect with connector of cable

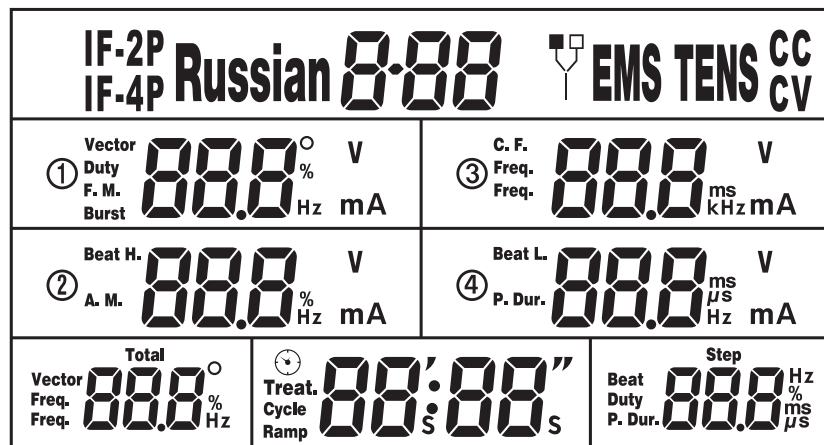4.2
User Interface



Symbol definitions		Symbol definitions	
IF-4P	IFC-Interferential (Traditional 4 Pole)	IF-2P	Premodulated (Traditional 2 Pole IFC)
	Electrical stimulation		Time indicator
①	Electrical output channel 1 indicator	②	Electrical output channel 2 indicator
③	Electrical output channel 3 indicator	④	Electrical output channel 4 indicator
CC	Constant current control	CV	Constant Voltages control

5. INSTALLATION

5.1 Before Use

Remove the equipment and all accessories from shipping carton and box. Visually check if there is any damage or missing parts or accessories. If yes, please report to local dealer or retailer where you purchase this unit. Your Quattro™ II equipment contains the following accessories.



	Part	Quantity
1	Rubber Electrodes, 60x90mm	4 pcs
2	Rubber Electrodes, 70x110mm	4 pcs
3	Electrode Sponges, 70x100mm	4 pcs
4	Electrode Sponges, 80x120mm	4 pcs
5	Self-adhesive Electrodes, 50x50mm	8 pcs
6	Self-adhesive Electrodes, 50x100mm	8 pcs
7	Elastic Wrap, 75x1200mm	2 pcs
8	Elastic Wrap, 75x600mm	2 pcs
9	Electrode wires (black/red)	4 pcs
10	Adapter 100-240V/50-60Hz	1 pc
11	Power cord	1 pc
12	Connector of cable	2 pcs
13	Use Manual	1 pc

**5.2
Connection
of the power
adapter**

- Connect the power cord to the power adapter.
- Connect the power adapter to the device connector.
- Connect the power adapter to a wall socket.

Caution:

- Prior to connecting this apparatus to the power supply, check that the voltage and frequency stated on the rating label match with the available power supply.
- The power adapter is a part of the supply circuit on which the device's safety partly depends. The approvals for Quattro™ II are only valid if used in combination with this type of adapter.

**5.3
Switching on**

Switch on the device, using ON/OFF switch (ⓘ).

**5.4
Switching off
and
disconnect
power adapter**

- Switch off the device by switching the ON/OFF switch from [⊙] to [⊖] position.
- Pull out the power adapter from the wall socket.
- Pull out the power adapter from device.

6. OPERATION

6.1 Measures with regard to treatments

- 6.1.1 Electrotherapy Before the treatment**
- Ensure there are no contraindications to treatment.
 - Inspect the treatment area skin seriously for any abrasions, inflammation, surface veins etc.
 - Clean the skin of the treatment area with soap or alcohol (70%).
 - If the skin is hairy, shaving can get optimal treatment.
 - Test the heat sensibility of the treatment area.

- 6.1.2 Electrode Placement**
- Examine the skin for any wounds and clean the skin.
 - Apply the electrodes to the treatment area.
 - Ensure the electrodes are applied securely to the skin.
 - Ensure good contact between each electrode and the skin.
 - Check the electrode contact regularly during the treatment.
 - Examine the skin again after the treatment.
 - Choose electrodes that fit the anatomy.
 - Follow electrode manufacturer instructions.
 - To avoid skin irritation due to high current density, do not use electrodes smaller in surface area than 25cm² self-adhesive electrode.




Caution

- Keep electrodes separated during treatment. Electrodes in contact with each other could result in improper stimulation or skin burns.
- Output current density is related to electrode size. Improper application may result in patient injury. If any question arises as to the proper electrode size, consult a licensed practitioner prior to therapy session.
- Powered muscle stimulators should be used only with the leads and electrodes recommended by the manufacturer.

6.1.3 Adhesive electrodes


This device is supplied with 8 pieces 50mm×50mm and 8 pieces 50mm×100mm adhesive electrodes. You can select the right adhesive electrodes according to treatment area and output current density. It is recommended that manufacturer's Electrodes be used whenever possible to ensure the highest level of contact with the treatment area and most uniform delivery of the prescribed electrotherapy treatment. Properly dispose of used Electrodes upon completion of the therapy session.

Electrode Instructions Connecting Lead Wires



Insert the lead with the Red (+) electrode connector into one adhesive Electrode. Insert the lead with the Black (-) electrode connector into the other electrode. Make certain the lead wires are seated completely into the electrodes, there are no bare metal of the pins exposed.

Securing Electrodes




Remove the adhesive Electrodes from the protective backing and apply to the treatment area as prescribed. Ensure the entire electrode surface is in contact with patient skin by pressing into place.

6.1.4. Rubber electrodes

If used for delivery of electrotherapy, there are two conductive mediums for you to select, the first one is use electrode sponges as conductive mediums, another is use other conductive medium such as Transmission Gel.


These Rubber Electrodes should be secured to the treatment area using the Nylon Wraps shipped with the Therapy System.

Reusable rubber Electrodes Connecting Lead Wires




Insert the lead with the Red (+) electrode connector into one rubber electrode. Insert the lead with the Black (-) electrode connector into the other rubber electrode. Make certain the lead wires are seated completely into the electrodes.

Conductive Medium 1




Inserted the Rubber Electrodes into the electrode sponges moistened with distilled water prior to placement on the patient.

Conductive Medium 2










Liberally apply Transmission Gel to electrode prior to placement on patient. Please note: Please purchase the Transmission gel with CE mark or FDA approved.







Securing Electrodes



Use Nylon Wrap to secure each rubber electrode in position on the patient.

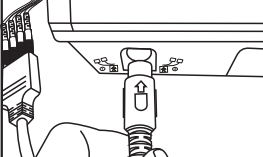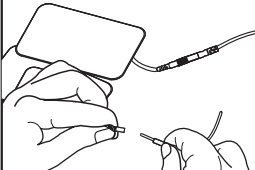6.2 Quick Set-up for Electrical Stimulation

	<p>1. In order to turn on the device, please press ON/OFF switch to [⊙] icon which is located on the side of the device</p>
	<p>2. When you turn the Quattro™ II on, the device will get down to self-check about 6~8 seconds, and then the default parameters are displayed the last treatment mode.</p>
	<p>3. Connect the electrode wires to the cable; please note the color of the wires and the color marks on the cable, they should be corresponding. Caution: If you want to use 4 channels, please connect all electrode wires to two cables.</p>
	<p>4. Two connectors are individual, each connector output two channels through a cable. So you can plug the cable(s) into one or two output connectors (⑫connectors) according to patient's need.</p>
	<p>5. Connect the electrodes to electrode wires.</p>
	<p>6. Place the electrodes on the patient according to section 6.1.</p>
<p>Waveform</p> 	<p>7. There are 5 therapeutic waveforms for you to select. Press the "Waveform" button to toggle the therapeutic waveform, and then rotating the Parameters control knob (⑬) to select waveform like IF-4P, IF-2P, TENS, EMS and Russian.</p>

 <p>Program CC/CV</p>	<p>8. Each therapeutic waveform has 10 programs. The details parameters for each program please refer to section 6.3 in this manual. Press the “Program” button to toggle the therapeutic program, and then rotating the Parameters control knob to select the therapeutic programs in corresponding waveform.</p>
<p>CC</p>	<p>9. Press “B2” Program button to select “CC” or “CV” control mode.</p>
	<p>10. Adjust the output intensity and start electrical treatment that you are using by rotating the output intensity adjustable knobs on the control panel. 0.5mA/step or 0.5V/step.</p>
<p>①  mA</p> <hr/> <p>②  mA</p>	<p>11. For safety using, load detection was designed in this device after the output intensity surpass 10.0mA/10.0V. If there are no electrodes stuck on patient’ skin, an alarm buzzer sound will appear and the intensity value flashing.</p>
	<p>12. Press the “⊖” button to stop treatment if any emergency happened.</p>
	<p>13. Press the “▶ ” button to pause treatment; you can press it again to restart the treatment.</p>

6.3 Using Preset Programs

Each therapeutic waveform has 10 programs. They have default parameters for each program, but you can set and save the parameters according to patient’s need. the default parameters for each program please refer to below:

4-Pole Interferential preset programs

Waveform	Program	Phase	CC/CV	Vector (Auto)	Vector (Manual)	C.F.	Beat. H	Beat. L	Treat. Time
Interferential Traditional (4P) IF-4P	1	1	CC	0	45°	4kHz	110Hz	100Hz	15min
		2	CC	0	45°	4kHz	110Hz	100Hz	0min
		3	CC	0	45°	4kHz	110Hz	100Hz	0min
	2	1	CC	0	45°	4kHz	150Hz	100Hz	10min
		2	CC	0	45°	4kHz	150Hz	100Hz	0min
		3	CC	0	45°	4kHz	150Hz	100Hz	0min
	3	1	CC	0	45°	4kHz	50Hz	50Hz	15min
		2	CC	0	45°	4kHz	50Hz	50Hz	0min
		3	CC	0	45°	4kHz	50Hz	50Hz	0min
	4	1	CC	0	45°	4kHz	150Hz	90Hz	15min
		2	CC	0	45°	4kHz	150Hz	90Hz	0min
		3	CC	0	45°	4kHz	150Hz	90Hz	0min
	5	1	CC	0	45°	4kHz	110Hz	100Hz	15min
		2	CC	0	45°	4kHz	110Hz	100Hz	0min
		3	CC	0	45°	4kHz	110Hz	100Hz	0min
	6	1	CC	0	45°	4kHz	110Hz	100Hz	15min
		2	CC	0	45°	4kHz	110Hz	100Hz	15min
		3	CC	0	45°	4kHz	110Hz	100Hz	15min
	7	1	CC	0	45°	4kHz	110Hz	100Hz	15min
		2	CC	0	45°	4kHz	110Hz	100Hz	15min
		3	CC	0	45°	4kHz	110Hz	100Hz	15min
	8	1	CC	0	45°	4kHz	110Hz	100Hz	15min
		2	CC	0	45°	4kHz	110Hz	100Hz	15min
		3	CC	0	45°	4kHz	110Hz	100Hz	15min
	9	1	CC	0	45°	4kHz	110Hz	100Hz	15min
		2	CC	0	45°	4kHz	110Hz	100Hz	15min
		3	CC	0	45°	4kHz	110Hz	100Hz	15min
	10	1	CC	0	45°	4kHz	110Hz	100Hz	15min
		2	CC	0	45°	4kHz	110Hz	100Hz	15min
		3	CC	0	45°	4kHz	110Hz	100Hz	15min

2-Pole
Interferential
programs

Waveform	Program	Phase	CC/ CV	C.F.	Beat. H	Beat. L	Cycle	Treat. Time
IFC Premod. (2P) IF-2P	1	1	CC	2500Hz	110Hz	100Hz	continuous	15min
		2	CC	2500Hz	110Hz	100Hz	continuous	0min
		3	CC	2500Hz	110Hz	100Hz	continuous	0min
	2	1	CC	2500Hz	150Hz	100Hz	continuous	10min
		2	CC	2500Hz	150Hz	100Hz	continuous	0min
		3	CC	2500Hz	150Hz	100Hz	continuous	0min
	3	1	CC	2500Hz	50Hz	50Hz	continuous	15min
		2	CC	2500Hz	50Hz	50Hz	continuous	0min
		3	CC	2500Hz	50Hz	50Hz	continuous	0min
	4	1	CC	2500Hz	150Hz	90Hz	continuous	15min
		2	CC	2500Hz	150Hz	90Hz	continuous	0min
		3	CC	2500Hz	150Hz	90Hz	continuous	0min
	5	1	CC	2500Hz	110Hz	100Hz	continuous	15min
		2	CC	2500Hz	110Hz	100Hz	continuous	0min
		3	CC	2500Hz	110Hz	100Hz	continuous	0min
	6	1	CC	2500Hz	110Hz	100Hz	continuous	15min
		2	CC	2500Hz	110Hz	100Hz	continuous	15min
		3	CC	2500Hz	110Hz	100Hz	continuous	15min
	7	1	CC	2500Hz	110Hz	100Hz	continuous	15min
		2	CC	2500Hz	110Hz	100Hz	continuous	15min
		3	CC	2500Hz	110Hz	100Hz	continuous	15min
	8	1	CC	2500Hz	110Hz	100Hz	continuous	15min
		2	CC	2500Hz	110Hz	100Hz	continuous	15min
		3	CC	2500Hz	110Hz	100Hz	continuous	15min
	9	1	CC	2500Hz	110Hz	100Hz	continuous	15min
		2	CC	2500Hz	110Hz	100Hz	continuous	15min
		3	CC	2500Hz	110Hz	100Hz	continuous	15min
	10	1	CC	2500Hz	110Hz	100Hz	continuous	15min
		2	CC	2500Hz	110Hz	100Hz	continuous	15min
		3	CC	2500Hz	110Hz	100Hz	continuous	15min

TENS
programs

Waveform	Program	Phase	CC/ CV	F.M.	Burst	Freq	A.M.	P. Dur.	Cycle	Treat. Time
TENS	1	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	0min
		3	CC	0	0	120Hz	0%	70µs	continuous	0min
	2	1	CC	0	0	200Hz	0%	60µs	continuous	20min
		2	CC	0	0	200Hz	0%	60µs	continuous	0min
		3	CC	0	0	200Hz	0%	60µs	continuous	0min
	3	1	CC	0	0	10Hz	0%	180µs	continuous	14min
		2	CC	0	0	10Hz	0%	180µs	continuous	0min
		3	CC	0	0	10Hz	0%	180µs	continuous	0min
	4	1	CC	0	0	80Hz	0%	100µs	continuous	30min
		2	CC	0	0	80Hz	0%	100µs	continuous	0min
		3	CC	0	0	80Hz	0%	100µs	continuous	0min
	5	1	CC	50Hz	0	180Hz	0%	30µs	continuous	16min
		2	CC	50Hz	0	180Hz	0%	30µs	continuous	0min
		3	CC	50Hz	0	180Hz	0%	30µs	continuous	0min
	6	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	7	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	8	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	9	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	10	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min

EMS programs




Waveform	Program	Phase	CC/CV	F.M.	Burst	Freq	A.M.	P. Dur.	Cycle	Treat. Time
EMS	1	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	0min
		3	CC	0	0	120Hz	0%	70µs	continuous	0min
	2	1	CC	0	0	200Hz	0%	60µs	continuous	20min
		2	CC	0	0	200Hz	0%	60µs	continuous	0min
		3	CC	0	0	200Hz	0%	60µs	continuous	0min
	3	1	CC	0	0	10Hz	0%	180µs	continuous	20min
		2	CC	0	0	10Hz	0%	180µs	continuous	0min
		3	CC	0	0	10Hz	0%	180µs	continuous	0min
	4	1	CC	0	0	80Hz	0%	100µs	continuous	30min
		2	CC	0	0	80Hz	0%	100µs	continuous	0min
		3	CC	0	0	80Hz	0%	100µs	continuous	0min
	5	1	CC	50Hz	0	180Hz	0%	30µs	continuous	16min
		2	CC	50Hz	0	180Hz	0%	30µs	continuous	0min
		3	CC	50Hz	0	180Hz	0%	30µs	continuous	0min
	6	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	7	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	8	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	9	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min
	10	1	CC	0	0	120Hz	0%	70µs	continuous	14min
		2	CC	0	0	120Hz	0%	70µs	continuous	14min
		3	CC	0	0	120Hz	0%	70µs	continuous	14min









Russian programs

Waveform	Program	Phase	CC/ CV	C. F.	Freq.	Duty	Cycle	Ramp	Treat. Time
Russian	1	1	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		2	CC	2500Hz	50Hz	50%	10s/10s	1s	0min
		3	CC	2500Hz	50Hz	50%	10s/10s	1s	0min
	2	1	CC	2500Hz	50Hz	50%	4s/12s	1s	10min
		2	CC	2500Hz	50Hz	50%	4s/12s	1s	0min
		3	CC	2500Hz	50Hz	50%	4s/12s	1s	0min
	3	1	CC	2500Hz	50Hz	50%	4s/12s	1s	10min
		2	CC	2500Hz	50Hz	50%	4s/12s	1s	0min
		3	CC	2500Hz	50Hz	50%	4s/12s	1s	0min
	4	1	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		2	CC	2500Hz	50Hz	50%	10s/10s	1s	0min
		3	CC	2500Hz	50Hz	50%	10s/10s	1s	0min
	5	1	CC	2500Hz	50Hz	50%	5s/5s	1s	20min
		2	CC	2500Hz	50Hz	50%	5s/5s	1s	0min
		3	CC	2500Hz	50Hz	50%	5s/5s	1s	0min
	6	1	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		2	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		3	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
	7	1	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		2	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		3	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
	8	1	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		2	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		3	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
	9	1	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		2	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		3	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
	10	1	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		2	CC	2500Hz	50Hz	50%	10s/10s	1s	10min
		3	CC	2500Hz	50Hz	50%	10s/10s	1s	10min




6.4
Each stimulation
set-up procedure


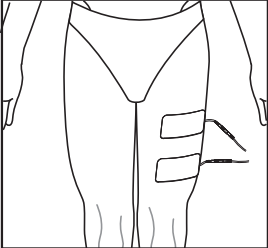



6.4.1
4-Pole
Interferential
Stimulation
Set-up
Procedure

	<p>1. In order to turn on the device, please press ON/OFF switch to [⊙] icon which is located on the side of the device.</p>
	<p>2. When you turn the Quattro™ II, the device will get down to self- check about 6~8 seconds, and then the default parameters are displayed the last treatment mode.</p>
<p>IF-4P</p>	<p>3. Press "B1" Waveform button to toggle the therapeutic waveform, then rotating the parameters control knob (ⓐ) to select "IF-4P" waveform.</p>
<p>P01</p>	<p>4. Press "B2" Program button to toggle the therapeutic program, and then rotating the parameters control knob (ⓐ) to select the therapeutic programs from P01 to P10. Each program has 3 treatment phases, you can set and save the parameters according to patient's need.</p>
<p>CC</p>	<p>5. Press "B2" Program button to select "CC" or "CV" control mode.</p>
	<p>6. There are two modes in Quattro™ II, press and hold ""B8" button to switch Normal mode and Professional mode. In professional mode, each program has 3 treatment phase, the LCD display like left figure. Rotating the parameters control knob (ⓐ) to select phase program from 1 to 3 when the device enter into professional mode. The parameters of each phase program can be set according to following methods.</p>
<p>Vector 45°</p>	<p>7. Press "B3" button to toggle Vector parameter, then rotating the parameters control knob (ⓐ) to set the vector (manual) parameter from 0° to 90°, 15°/step.</p>
<p>Vector 0%</p>	<p>8. Press "B3" button again, the vector parameter change to auto mode, the LCD display "0%" like left figure. rotating the parameters control knob (ⓐ) to set the vector (auto) parameter from 0% to 100%, 20%/step.</p>





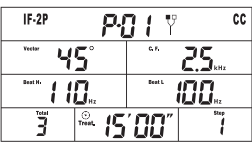


<p>Beat H.</p> 	<p>9. Press "B5" button to toggle Beat H. parameter, then rotating the parameters control knob (③) to set the parameter from (Beat. L) Hz to 150Hz, 1Hz/step.</p>
<p>Beat L.</p> 	<p>10. Press "B6" button to toggle Beat L. parameter, then rotating the adjust parameters control knob (③) to set the parameter from 1Hz to (Beat. H)Hz, 1Hz/step.</p>
<p>Treat.</p> 	<p>11. Press "B7" button to toggle Treat. time parameter, then rotating the parameters control knob (③) to set the treatment time from 1min to 60min, 1min/step.</p>
	<p>12. Stick the electrodes on the patient. You will need two electrodes for each channel, four in total.</p>
<p>①</p>  <hr/> <p>②</p> 	<p>13. Adjust the output intensity and start electrical treatment that you are using by rotating the output intensity adjustable knobs on the control panel. 0.5mA/step or 0.5V/step. For safety using, load detection was designed in this device after the output intensity surpass 10.0mA/10.0V. If there are no electrodes stuck on patient' skin, an alarm buzzer sound will appear and the intensity value flashing.</p>
	<p>14. Press the "⊙" button to stop treatment if any emergency happened.</p>
	<p>15. Press the "▶ " button to pause treatment; you can press it again to restart the treatment.</p>












6.4.2
2-Pole
Interferential
Stimulation
Set-up
Procedure

	<p>1. In order to turn on the device, please press ON/OFF switch to [⊙] icon which is located on the side of the device.</p>
	<p>2. When you turn the Quattro™ II on, the device will get down to self-check about 6~8 seconds, and then the default parameters are displayed the last treatment mode.</p>
<p>IF-2P</p>	<p>3. Press “B1” Waveform button to toggle the therapeutic waveform, then rotating the parameters control knob (ⓐ) to select “IF-2P” waveform.</p>
<p>P01</p>	<p>4. Press “B2” Program button to toggle the therapeutic program, and then rotating the parameters control knob (ⓐ) to select the therapeutic programs from P01 to P10. Each program has 3 treatment phases, you can set and save the parameters according to patient’s need.</p>
<p>CC</p>	<p>5. Press “B2” Program button to select “CC” or “CV” control mode.</p>
	<p>6. There are two modes in Quattro™ II, press and hold “B8” button to switch Normal mode and Professional mode. In professional mode, each program has 3 treatment phase, the LCD display like left figure. Rotating the parameters control knob (ⓐ) to select phase program from 1 to 3 when the device enter into professional mode. The parameters of each phase program can be set according to following methods.</p>
<p>Beat H. 110 Hz</p>	<p>8. Press “B5” button to toggle Beat H. parameter, then rotating the parameters control knob (ⓐ) to set the parameter from (Beat. L) Hz to 150Hz, 1Hz/step.</p>
<p>Beat L. 100 Hz</p>	<p>9. Press “B6” button to toggle Beat L. parameter, then rotating the parameters control knob (ⓐ) to set the parameter from 1 Hz to (Beat. H)Hz, 1Hz/step.</p>
<p>Treat. 15'00"</p>	<p>10. Press “B7” button to toggle Treat. time parameter, then rotating the parameters control knob (ⓐ) to set the treatment time from 1min to 60min, 1min/step.</p>




	<p>11. Press “B7” button again to toggle Cycle time parameter, then rotating the parameters control knob (③) to select the cycle time from “-/- (continuous)”, “5/5”, “4/12”, “10/10”, “10/20”, “10/30” and “10/50”.</p>
	<p>12. Stick the electrodes on the patient. You can use one or two channel as your needs.</p>
	<p>13. Adjust the output intensity and start electrical treatment that you are using by rotating the output intensity adjustable knob on the control panel. 0.5mA/step or 0.5V/ step. For safety using, load detection was designed in this device after the output intensity surpass 10. 0mA/10. 0V. If there are no electrodes stuck on patient’ skin, an alarm buzzer sound will appear and the intensity value flashing.</p>
	<p>14. Press the “⊗” button to stop treatment if any emergency happened.</p>
	<p>15. Press the “▶ ” button to pause treatment; you can press it again to restart the treatment.</p>

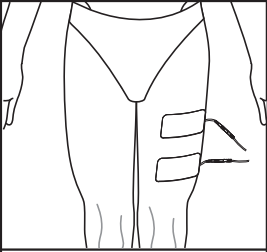





6.4.3
TENS
and EMS
Stimulation
Set-up
Procedure

	<p>1. In order to turn on the device, please press ON/OFF switch to [] icon which is located on the side of the device.</p>
	<p>2. When you turn the Quattro™ II on, the device will get down to self- check about 6~8 seconds, and then the default parameters are displayed the last treatment mode.</p>
<p>EMS/TENS</p>	<p>3. Press “B1” Waveform button to toggle the therapeutic waveform, then rotating the parameters control knob (③) to select TENS or EMS waveform.</p>
<p>P01</p>	<p>4. Press “B2” Program button to toggle the therapeutic program, and then rotating the parameters control knob (③) to select the therapeutic programs from P01 to P10. Each program has 3 treatment phases, you can set and save the parameters according to patient’s need.</p>
<p>CC</p>	<p>5. Press “B2” Program button to select “CC” or “CV” control mode.</p>
	<p>6. There are two modes in Quattro™ II, press and hold “B8” button to switch Normal mode and Professional mode. In professional mode, each program has 3 treatment phase, the LCD display like left figure. Rotating the parameters control knob (③) to select phase program from 1 to 3 when the device enter into professional mode. The parameters of each phase program can be set according to following methods.</p>
<p>F. M. </p>	<p>7. Press “B3” button to toggle F.M. parameter, then rotating the parameters control knob (③) to set the F.M. parameter from 0Hz to 249Hz, 1 Hz/step. But F.M. + Freq. ≤ 250Hz.</p>
<p>Burst </p>	<p>8. Press “B3” button again to toggle Burst rate, then rotating the parameters control knob (③) to set the Burst rate from 0Hz to 10Hz, 1 Hz/step. But Burst × 8 ≤ Freq.</p>
<p>Freq. </p>	<p>9. Press “B4” button to toggle Freq. parameter, then rotating the parameters control knob (③) to set the frequency from 1 Hz to 250Hz, 1 Hz/step. But Freq. ≥ Burst × 8 or Freq. ≤ 250 - F.M.</p>

<p>A. M. </p>	<p>10. Press "B5" button to toggle A.M. parameter, then rotating the parameters control knob (③) to set the parameter from 0% to 100%, 20%/step.</p>
<p>P. Dur. </p>	<p>11. Press "B6" button to toggle P.Dur. parameter, then rotating the parameters control knob (③) to set the pulse duration from 30μs to 400μs, 5μs/step.</p>
<p> Treat. </p>	<p>12. Press "B7" button to toggle Treat. time parameter, then rotating the parameters control knob (③) to set the treatment time from 1min to 60min, 1 min/step.</p>
<p> Cycle </p>	<p>13. Press "B7" button again to toggle Cycle time parameter, then rotating the parameters control knob (③) to select the cycle time from "-/- (continuous)", "4/4", "4/8", "7/7", "5/5", "4/12", "10/10", "10/20", "10/30" and "10/50".</p>
	<p>14. Stick the electrodes on the patient. You can use one or two channel as your needs.</p>
<p>① </p> <hr/> <p>② </p>	<p>15. Adjust the output intensity and start electrical treatment that you are using by rotating the output intensity adjustable knob on the control panel. 0.5mA/step or 0.5V/ step. For safety using, load detection was designed in this device after the output intensity surpass 10. 0mA/10. 0V. If there are no electrodes stuck on patient' skin, an alarm buzzer sound will appear and the intensity value flashing.</p>
	<p>16. Press the "⏏" button to stop treatment if any emergency happened.</p>
	<p>17. Press the "▶ " button to pause treatment; you can press it again to restart the treatment.</p>

6.4.4
Russian
Stimulation
Set-up
Procedure

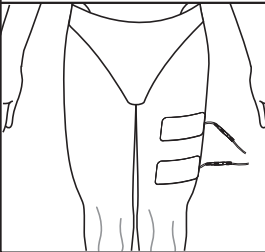	<p>1. In order to turn on the device, please press ON/OFF switch to [⊙] icon which is located on the side of the device.</p>
	<p>2. When you turn the Quattro™ II on, the device will get down to self- check about 6~8 seconds, and then the default parameters are displayed the last treatment mode.</p>
<p>Russian</p>	<p>3. Press “B1” Waveform button to toggle the therapeutic waveform, then rotating the parameters control knob (③) to select “Russian” waveform.</p>
<p>P01</p>	<p>4. Press “B2” Program button to toggle the therapeutic program, and then rotating the parameters control knob (③) to select the therapeutic programs from P01 to P10. Each program has 3 treatment phases, you can set and save the parameters according to patient’s need.</p>
<p>CC</p>	<p>5. Press “B2” Program button to select “CC” or “CV” control mode.</p>
	<p>6. There are two modes in Quattro™ II, press and hold “B8” button to switch Normal mode and Professional mode. In professional mode, each program has 3 treatment phase, the LCD display like left figure. Rotating the parameters control knob (③) to select phase program from 1 to 3 when the device enter into professional mode. The parameters of each phase program can be set according to following methods.</p>
<p>Freq. 50 Hz</p>	<p>7. Press “B4” button to toggle Freq. parameter, then rotating the parameters control knob (③) to set the frequency from 20Hz to 100Hz, 5Hz/step.</p>
<p>Duty 50 %</p>	<p>8. Press “B3” button to toggle Duty parameter, then rotating the parameters control knob (③) to set the parameter from 10% to 50%, 10%/step.</p>
<p>Treat. 10'00"</p>	<p>9. Press “B7” button to toggle Treat. time parameter, then rotating the parameters control knob (③) to set the treatment time from 1 min to 60min, 1 min/step.</p>

	<p>10. Press "B7" button again to toggle Cycle time parameter, then rotating the parameters control knob (③) to select the cycle time from "-/-(continuous)", "5/5", "4/12", "10/10", "10/20", "10/30" and "10/50".</p>
	<p>11. Press "B7" button again to toggle Ramp time parameter, then rotating the parameters control knob (③) to select the ramp time from 1s, 2s and 5s.</p>
	<p>12. Stick the electrodes on the patient. You can use one or two channel as your needs.</p>
	<p>13. Adjust the output intensity and start electrical treatment that you are using by rotating the output intensity adjustable knob on the control panel. 0.5mA/step or 0.5V/ step. For safety using, load detection was designed in this device after the output intensity surpass 10. 0mA/10. 0V. If there are no electrodes stuck on patient' skin, an alarm buzzer sound will appear and the intensity value flashing.</p>
	<p>14. Press the "⏏" button to stop treatment if any emergency happened.</p>
	<p>15. Press the "▶ " button to pause treatment; you can press it again to restart the treatment.</p>

7. MAINTENANCE

7.1 Cleaning of the device Switch off the device and disconnect it from the power supply. The apparatus can be cleaned with a damp cloth. Use lukewarm water and a non-abrasive liquid household cleaner (no abrasive, no alcohol content solution). If a more sterile cleaning is needed, use a cloth moistened with an antimicrobial cleaner.



Do not submerge the apparatus in liquids. Should the unit accidentally become submerged, contact the dealer or Authorized Service center immediately. Do not attempt to use a system that has been wet inside until inspected and tested by a Service Technician Certified by Authorized Service center. Do not allow liquids to enter the ventilation holes.

7.2 Cleaning the electrodes

- Apply the protective backing to the tacky side of the electrode. Place the electrode on the side of the protective backing that is labeled with the word on.
- It may be helpful to improve repeated application by spreading a few drops of cold water over the adhesive and turn the surface up to air dry. Over Saturation with water will reduce the adhesive properties.
- Between uses, store the electrodes in the reusable bag in a cool dry place.



- The electrodes are intended for single patient use only.
- If irritation occurs, discontinue use and consult your clinician.
- Always use the electrodes with CE mark, or are legally marketed in the US under 510(K) procedure.

7.3 Cleaning the lead wires and cables Periodically wipe the lead wires clean with a cloth dampened in a mild soap solution, and then gently wipe them dry. Use of rubbing alcohol on the lead wires will damage the insulation and dramatically shorten their life.

7.4 Maintenance

- Maintenance and all repairs should only be carried out by an authorized agency. The manufacturer will not be held responsible for the results of maintenance or repairs by unauthorized persons.
- Opening of the equipment by unauthorized agencies is not allowed and will terminate any claim to warranty.

8. TROUBLESHOOTING

For optimal use:

- Replace lead wires annually.
- Please follow the directions on the electrode packaging for the care of electrodes. The life of the electrodes varies, depending on skin conditions, skin preparation, storage and climate. Replace electrodes that no longer stick.
- NOTE: If the following measures fail to alleviate the problem, please call your dealer.

Problem	Possible Cause	Solution
Displays fail to light up	Adapter contact failure	Ensure adapter is connect. Check the following contacts: <ul style="list-style-type: none"> • All contacts are in place. • All contacts are not broken.
Stimulation weak	Electrodes 1. Dried out or contaminated 2. Placement	1. Replace. 2. Electrodes must be a minimum of 2 inches apart.
	Lead wires Old/worn/damaged	Replace.
Stimulation stops	Poor electrode contact	Reapply electrodes, secure firmly.
Stimulation is uncomfortable.	Damaged or worn electrodes or lead wires	Replace
	Intensity is too high	Decrease intensity.
	Electrodes are too close together	Reposition the electrodes.
		Electrodes must be a minimum of 2 inches apart.
	Damaged or worn electrodes or lead wires	Replace.
Electrode active area size is too small.	Replace electrodes with ones that have an active area no less than 25.0cm ² .	
Stimulation is ineffective.	Improper electrode	Reposition electrode
	Unknown	Contact clinician.
"E1" displays on LCD	Communication failure is detected	Restart the device, if the problem is still exist, please contact the manufacturer or distributor
"E2" displays on LCD	The device detected the temperature transmitter was open circuit or short circuit	

"E3" displays on LCD	Detected the device over limitative temperature	The device will stop treatment automatically, please wait several minutes before using again.
"E4" displays on LCD	Detected the working current over the limit	
"E5" displays on LCD	Memorizer failure is detected	Restart the device, if the problem is still exist, please contact the manufacturer or distributor

9. SPECIFICATIONS

9.1 General Specifications:

Adapter supply voltage:	100V-240V, 50Hz-60Hz, 0.5A
Adapter output:	15V --- 1A Max.
Adapter Dimensions:	110mm(L)*54mm(W)*33mm(H)
Dimensions:	250mm(L)*185mm(L)*82mm(H)
Operating Environmental:	Temperature: 10°C(50°F) to 40°C(104°F), Relative humidity: 30%-85%
Storage Environmental:	Temperature: -20°C(-4°F) to 55°C(131°F), Relative humidity: 20%-90%
Maximum Treatment Time:	60 minutes

9.2 Waveform Specifications:

4-Pole Interferential Mode

Waveform Type	Bi-phasic square
Mode Selection	CC (Constant Current) or CV (Constant Voltage)
Vector	Auto: 0%-100% Manual: 0°-90°
Carrier Frequency (C.F.)	4.0kHz
Sweep Low Beat Frequency (Beat H.)	(Beat L.) -150 Hz
Sweep High Beat Frequency (Beat L.)	1-(Beat H.) Hz
Output Intensity	0-50mA(CC, at 1k ohm load) 0-50V(CV, at 1k ohm load)
Treatment time	1-60 minutes

**2-Pole
Interferential
Mode**

Waveform Type	Bi-phasic square
Mode Selection	CC (Constant Current) or CV (Constant Voltage)
Carrier Frequency (C.F.)	2.5kHz
Sweep Low Beat Frequency (Beat H.)	(Beat L.) -150 Hz
Sweep High Beat Frequency (Beat L.)	1-(Beat H.) Hz
Output Intensity	0-50mA(CC, at 1k ohm load) 0-50V(CV, at 1k ohm load)
Treatment time	1-60 minutes
Cycle time (cycle)	Continuous, 5/5, 4/12, 10/10, 10/20, 10/30, 10/50
Ramp time (Ramp)	2 seconds

**TENS and
EMS Mode**

Waveform Type	Mono- or Bi-phasic square
Mode Selection	CC (Constant Current) or CV (Constant Voltage)
Frequency	1 - 250 Hz
Frequency Modulation (F.M.)	0-249Hz
Burst rate (Burst)	0-10Hz (7 pulse)
Phase duration (P.Dur.)	30-400 μ s
Amplitude Modulation (A.M.)	0%-100%
Output Intensity	0-100mA(CC, at 1k ohm load) 0-100V(CV, at 1k ohm load)
Cycle time (Cycle)	Continuous, 4/4, 4/8, 7/7, 5/5, 4/12, 10/10, 10/20, 10/30, 10/50
Treatment time	1-60 minutes
Ramp time	1 second

Russian Mode	Waveform Type	Bi-phasic square
	Mode Selection	CC (Constant Current) or CV (Constant Voltage)
	Carrier Frequency (C.F.)	2 .5kHz
	Burst frequency (Freq.)	20-100 Hz
	Output Intensity	0-50mA(CC, at 1k ohm load) 0-50V(CV, at 1k ohm load)
	Duty cycle	10%, 20%, 30%, 40%, and 50%.
	Cycle time	Continuous, 5/5, 4/12, 10/10, 10/20, 10/30, 10/50.
	Treatment time	1-60 minutes
	Ramp time	1s, 2s, and 5s

**10
STORAGE**

For a prolonged pause in treatment, store the device with the adapter in a dry room and protect it against heat, sunshine and moisture. Store the machine in a cool, well-ventilated place. Never place any heavy objects on the machine.

**11
DISPOSAL**




Please dispose of the device in accordance with the directive 2002/96/EC – WEEE (Waste Electrical and Electronic Equipment). Contact your local distributor for information regarding disposal of the unit and accessories.

**12
EMC TABLE**

Guidance and manufacturer's declaration - electromagnetic emissions		
<p>The Quattro™ II device is intended for use in the electromagnetic environment specified below. The customer or the user of the Quattro™ II should assure that it is used in such an environment.</p>		
Emissions test	Compliance	Electromagnetic environment - guidance
RF emissions CISPR 11	Group 1	The Quattro™ II device uses RF energy only for its internal function. Therefore, its RF emissions are very low and are not likely to cause any interference in nearby electronic equipment.
RF emissions CISPR11	Class B	The Quattro™ II device is suitable for use in all establishments other than domestic and those directly connected to the public low-voltage power supply network that supplies buildings used for domestic purposes.
Harmonic emissions IEC 61000-3-2	Not applicable	
Voltage fluctuations / flicker emissions IEC 61000-3-3	Not applicable	

Guidance and manufacturer's declaration — electromagnetic immunity			
<p>The Quattro™ II device is intended for use in the electromagnetic environment specified below. The customer or the user of the Quattro™ II should assure that it is used in such an environment.</p>			
Immunity test	IEC 60601 test level	Compliance level	Electromagnetic environment - guidance
Electrostatic discharge (ESD) IEC 61000-4-2	±6 kV contact ±8 kV air	±6 kV contact ±8 kV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic material, the relative humidity should be at least 30 %.

Guidance and- manufacturer's declaration. Electromagnetic immunity			
The Quattro™ II device is intended for use in the electromagnetic environment specified below. The customer or the user of the Quattro™ II should assure that it is used in such an environment.			
Immunity test	IEC 60501 test level	Compliance level	Electromagnetic environment - guidance
			Portable and mobile RF communications equipment should be used no closer to any part of the E-Stim Basic Quattro™ II device, including cables, than the recommended separation distance calculated from the equation applicable to the frequency of the transmitter.
			Recommended separation distance
Conducted RF IEC 61000-4-6	3 Vrms 150 kHz to 80 MHz	3 Vrms	$d = 1.2\sqrt{P}$
Radiated RF IEC 61000-4-3	3 V/m 80 MHz to 2.5 GHz	3 V/m	$d = 1.2\sqrt{P}$ 80MHz to 800MHz
			$d = 2.3\sqrt{P}$ 80MHz to 2.5MHz
			where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer and d is the recommended separation distance in meters (m). Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey, should be less than the compliance level in each frequency range.

			<p>Interference may occur In the vicinity of equipment marked with the following symbol:</p>
			
<p>NOTE 1 At 80 MHz ends 800 MHz. the higher frequency range applies. NOTE 2 These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.</p>			
<p>a Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) telephones and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the Quattro™ II device is used exceeds the applicable RF compliance level above, should be observed to verify normal operation. If abnormal performance is observed, additional measures may be necessary, such as reorienting or relocating the Quattro™ II.</p> <p>b Over the frequency range 150 kHz to 80 MHz, field strengths should be less than [Vi] V/m.</p>			

<p>Recommended separation distances between portable and mobile RF communications equipment and the Quattro™ II device</p>
<p>The Quattro™ II device is intended for use in an electromagnetic environment in which radiated RF disturbances are controlled. The customer or the user of the Quattro™ II device can help prevent electromagnetic interference by maintaining a minimum distance between portable and mobile RF communications equipment (transmitters) and the Quattro™ II as recommended below, according to the maximum output power of the communications equipment.</p>

Rated maximum output power of transmitter W	Separation distance according to frequency of transmitter		
	150 kHz to 80 MHz $d=1.2\sqrt{P}$	80 MHz to 800 MHz $d=1.2\sqrt{P}$	800 MHz to 2,5 GHz $d=2.3\sqrt{P}$
0.01	0.12	0.12	0.23
0.1	0.38	0.38	0.73
1	1.2	1.2	2.3
10	3.8	3.8	7.3
100	12	12	23

For transmitters rated at a maximum output power not listed above, the recommended separation distance d in meters (m) can be estimated using the equation applicable to the frequency of the transmitter, where P is the maximum output power rating of the transmitter in watts (W) accordable to the transmitter manufacturer.

NOTE 1 At 80 MHz and 800 MHz. the separation distance for the higher frequency range applies.

NOTE 2 These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

13. WARRANTY

Please contact your dealer or the device center in case of a claim under the warranty. If you have to send in the device, enclose a copy of your receipt and state the defect.

A. The following warranty terms apply:

- The warranty period for Quattro™ II products is one year from date of purchase. In case of a warranty claim, the date of purchase has to be proven by means of the sales receipt or invoice.
- Defects in material or workmanship will be removed free of charge within the warranty period.
- Repairs under warranty do not extend the warranty period either for the device or for the replacement parts.

B. The following is excluded under the warranty:

- All damage which has arisen due to improper treatment, e.g. nonobservance of the user instruction.
- All damage which is due to repairs or tampering by the customer or unauthorized third parties.
- Damage which has arisen during transport from the manufacturer to the consumer or during transport to the service centre.
- Accessories which are subject to normal wear and tear.

- Liability for direct or indirect consequential losses caused by the unit is excluded even if the damage to the unit is accepted as a warranty claim.

14. NORMALIZED SYMBOLS



ON/OFF Switch



Power polarity



Type BF Applied Part



Type of protection against electric shock:
Class II Equipment



Refer to Instruction Manual.



Electrical devices are recyclable material and should not be disposed of with household waste after their useful life! Help us to protect the environment and save resources and take this device to the appropriate collection points. Please contact the organization which is responsible for waste disposal in your area if you have any questions.



Equipment capable of delivering output values in excess of 10 mA r.m.s. or 10V r.m.s. averaged over any period of 5 s



Stop treatment



Start/Pause the treatment



CURRENT SOLUTIONS™

Manufactured for:
Current Solutions™ LLC
3814 Woodbury Drive
Austin, TX 78704
Ph: (800) 871-7858
www.currentsolutionsnow.com